


HYDRAULIC BOOM

HEDGE MOWERS



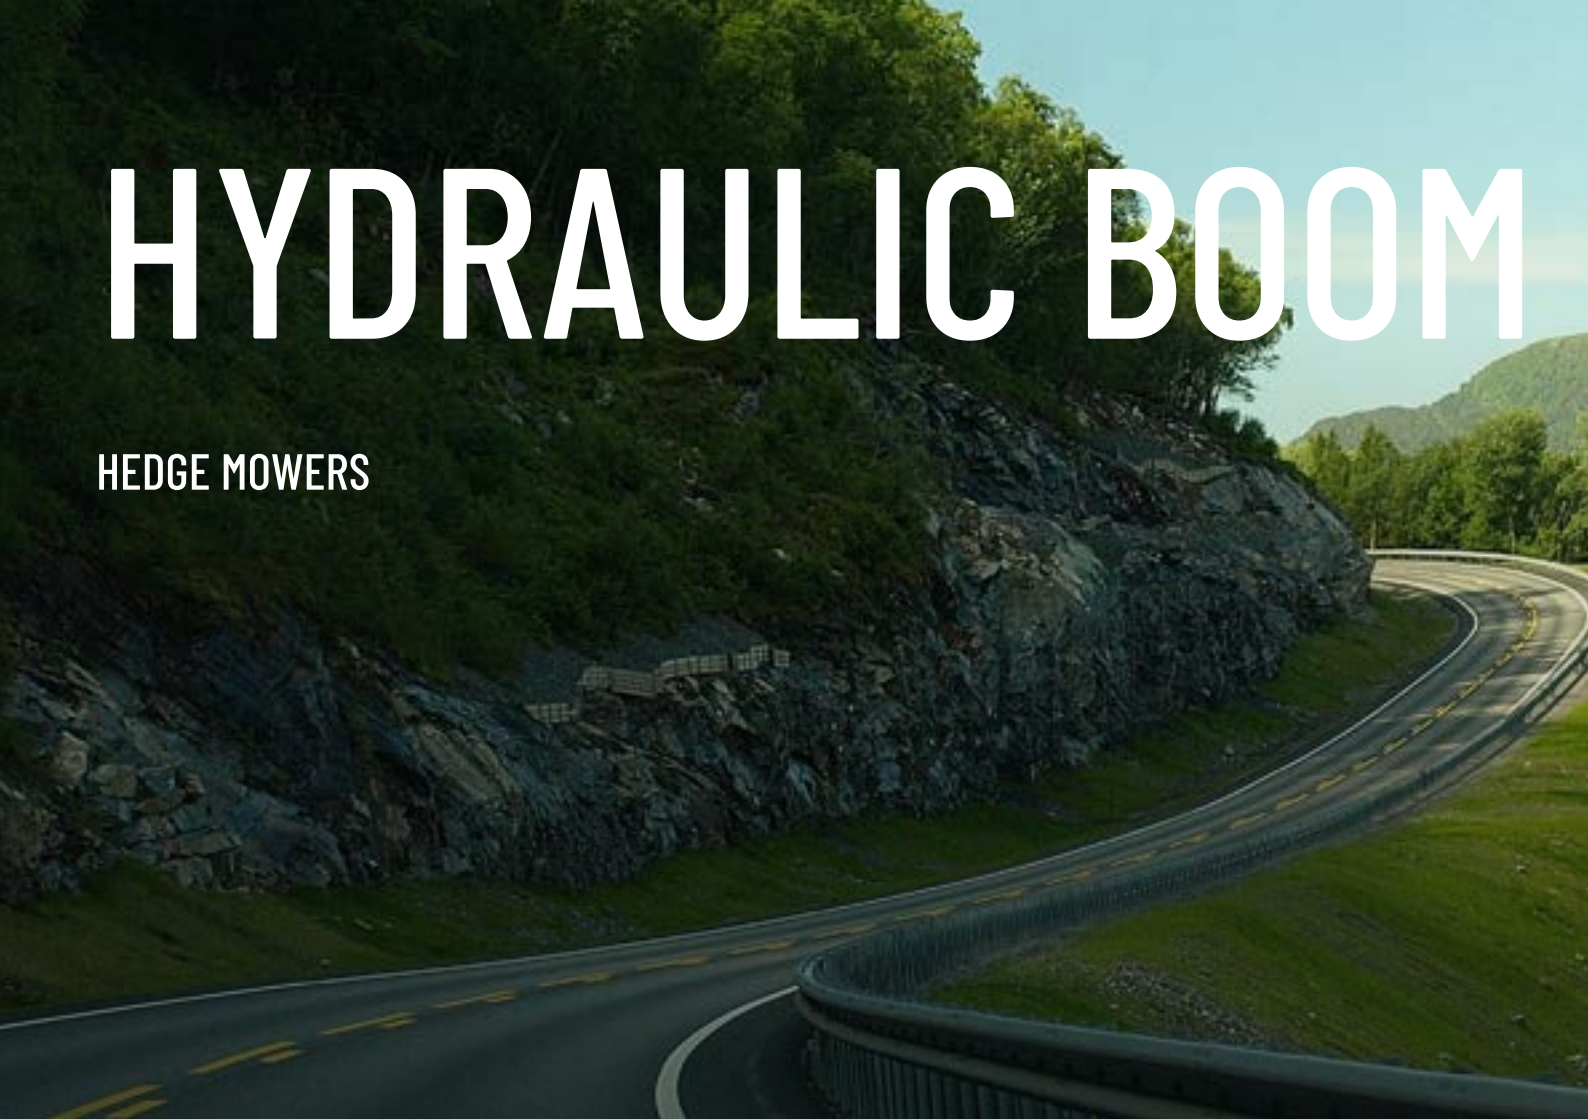

FB/X



20-30 HP



Ø 2 cm



	FB/X
Working width (cm)	150
Head rotation	360°
Tank capacity (lt)	40
Minimum tractor weight (kg)	700
Weight (kg)	280

FB/G 250-250S



20-30 HP



Ø 2 cm



	FB/G 250	FB/G 250 S
Working width (cm)	60	60
Head rotation	190°	190°
Tank capacity (lt)	70	70
Y blades	24	24
Minimum tractor weight (kg)	900	900
Weight (kg)	315	350



FB/G 300-300S-380-380S



40-60 HP



Ø 2 cm



	FB/G 300	FB/G 300 S	FB/G 380	FB/G 380 S
Working width (cm)	80	80	80	80
Head rotation	190°	190°	190°	190°
Tank capacity (lt)	95	95	95	95
Blades	32	32	32	32
Minimum tractor weight (kg)	1300	1300	1400	1400
Weight (kg)	480	510	490	520

FB/PG 320



40-60 HP



Ø 3 cm



STRENX

	FB/PG 320
Working width (cm)	80
Head rotation	190°
Tank capacity (lt)	95
Blades	32
Minimum tractor weight (kg)	1500
Weight (kg)	550



FB/PG 440-480



70-90 HP



Ø 4 cm



STRENX

	FB/PG 440	FB/PG 480
Working width (cm)	100	100
Head rotation	190°	190°
Tank capacity (lt)	120	120
Blades	40	40
Minimum tractor weight (kg)	2600	3200
Weight (kg)	765	785

FB/P 400S-480-560



70-100 HP



Ø 4 cm



STRENX

	FB/P 400S	FB/P 480	FB/P 560
Working width (cm)	100	100	100
Head rotation	190°	190°	190°
Tank capacity (lt)	120	120	120
Blades	40	40	40
Minimum tractor weight (kg)	2400	2600	3000
Weight (kg)	700	740	760



FB/ARC STX 380



60-90 HP



Ø 3 cm



STRENX

FB/ARC 380 STX

Working width (cm)	80
Head rotation	190°
Min arm width (cm)	90
Max arm height (cm)	270
Tank capacity (lt)	95
Blades	32
Minimum tractor weight (kg)	2200
Weight (kg)	620

FB/ARC STX 430-600



80-100 HP



Ø 2 cm



STRENX

	FB/ARC 430 STX	FB/ARC 600 STX
Working width (cm)	100	100
Head rotation	190°	190°
Min arm width (cm)	120	130
Max arm height (cm)	300	320
Tank capacity (lt)	125	125
Blades	40	40
Minimum tractor weight (kg)	3000	3500
Weight (kg)	920	960



FB/P 430



70-100 HP



Ø 4 cm



STRENX[®]

	FB/P 430
Working width (cm)	100
Head rotation	245°
Tank capacity (lt)	125
Blades	40
Minimum tractor weight (kg)	3000
Weight (kg)	880

FB/P 500-580



80-120 HP



Ø 5 cm



STRENX

	FB/P 500	FB/P 580
Working width (cm)	100	100
Head rotation	245°	245°
Tank capacity (lt)	140	140
Blades	40	40
Minimum tractor weight (kg)	3500	3800
Weight (kg)	960	1080



FB/P 600



90-140 HP



Ø 5 cm



STRENX®

	FB/P 600
Working width (cm)	120
Head rotation	245°
Tank capacity (lt)	225
Blades	48
Minimum tractor weight (kg)	4200
Weight (kg)	1370

FB/T 660-730



100-150 HP



Ø 5 cm



STRENX

	FB/T 660	FB/T 730
Working width (cm)	120	120
Head rotation	245°	245°
Tank capacity (lt)	225	225
Blades	48	48
Minimum tractor weight (kg)	4500	5000
Weight (kg)	1420	1470



FB/P SA 500-600



90-150 HP



Ø 5 cm



STRENX

	FB/P 500 SA	FB/P 600 SA
Working width (cm)	100	120
Head rotation	245°	245°
Tank capacity (lt)	140	225
Blades	40	48
Minimum tractor weight (kg)	3500	4800
Weight (kg)	1020	1430

FB/P A.H.G. 500-600



100-150 HP



Ø 5 cm



STRENX

	FB/P 500 AHG	FB/P 600 AHG
Working width (cm)	100	120
Head rotation	245°	245°
Tank capacity (lt)	140	225
Y blades	40	48
Minimum tractor weight (kg)	4000	5000
Weight (kg)	1100	1540

